

SCRIBE 60X40 U STANDARD


INTEGRABLE · SCRIBE MARKING

- Scribe marking unit, **silent and compact**, with **small dimensions**, especially designed for integration in production lines.



ADVANTAGES

- **Silent**, improves comfort in the working environment and for the operator.
- Great **reliability**, uninterrupted productions and lower maintenance costs.
- **Minimum dimensions**, making it the **smallest scribe marker unit on the market** in its marking area.
- Highly **robust and long-lasting**, thanks to the high quality of its components.
- **High marking speed**, for all kinds of materials and hardnesses up to 62HRC.
- Circular connector that **facilitates assembly and disassembly**.

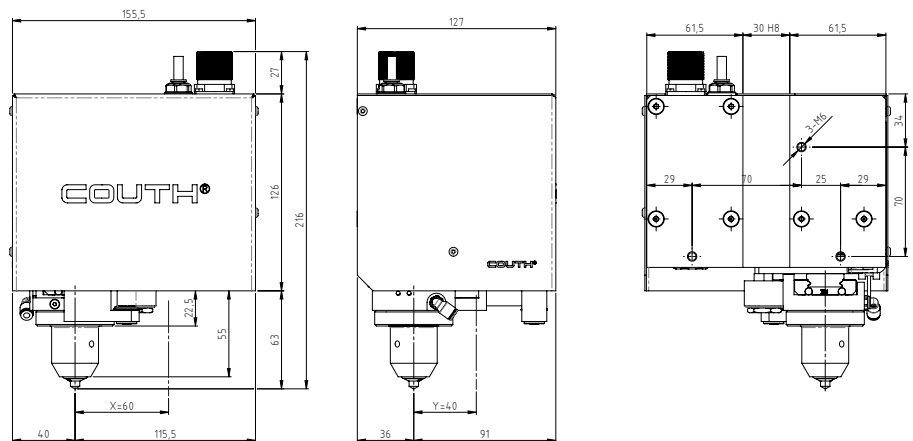

Area	Dimensions (mm)			Weight	Depth
	X x Y	Width	Depth		
60 x 40	155.5	127	216	6	0.15 mm

CHARACTERISTICS

- 60 x 40 mm marking area.
- Mark depth, up to 0.15 mm.
- Up to 2-bar air pressure.
- Speed up to 12 characters/second.
- Hardness of materials to mark up to 62HRC.
- Wide range of characters, from 0.1 mm to complete area.
- Marking alphanumeric codes, logotypes, DATAMATRIX™, QR codes, etc.
- R20 marking cylinder.
- Possibility of using different punch shapes..
- Telescopic plate protection system.
- Built-in circular connector that facilitates maintenance.
- 2.5-meter robotics cable, with customisation possibilities.
- Connection with **COUTH** control unit for integration in production lines (see technical file for more information).
- PC edition software.