

DOT 150x100 P+N STANDARD



HYBRID SYSTEMS · DOT PEEN MARKING BENCHTOP+ PORTABLE



- **Hybrid** dot peen marking station, **autonomous**, with height regulation and **option to be used portably**, with **maximum speed**. Maximum flexibility in use; station mode for marking small batches and changing productions, portable mode to mark pieces in any area and position. Especially recommended for **VIN marking in the automobile industry**

ADVANTAGES

- **Maximum flexibility**, option to convert the marking station into a portable marking unit.
- **Maximum marking speed**, for all kinds of materials and hardnesses up to 62HRC.
- Highly **robust and long-lasting**, thanks to the high quality of its components.
- **Versatility in the size of the pieces to be marked**, thanks to regulation up to 250 mm in height, so you can mark everything from thin sheets to large pieces, including fastening.
- Machined work surface, guaranteeing **precision** in marking.
- T-slot to facilitate **tool placement**.
- Possibility of anchoring the table to a surface for **greater stability**.
- **Portable version:**
 - Can mark **large pieces**
 - **Ergonomic and lightweight**, facilitates access to any position and handling for the operator,
 - **Built-in supports** for proper securing and distance from the marking unit to the piece, **thereby guaranteeing quality of the mark**.

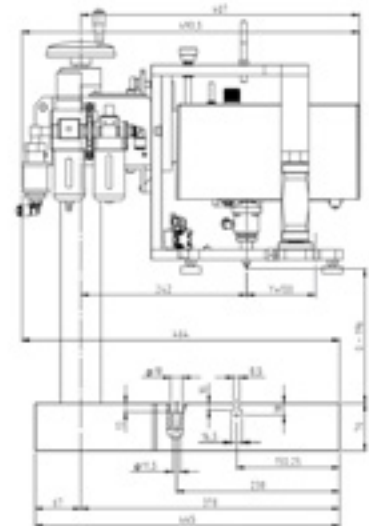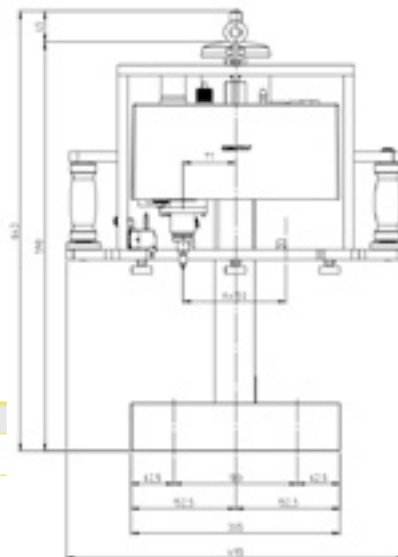

Area	Dimensions (mm)			Weight
	X x Y	Width	Depth	
150 x 100	495	493,5	643	55

CHARACTERISTICS

- Table for placing tools and plate stand.
- Column with height regulation up to 250 mm
- 150 x 100 mm marking area.
- Speed up to 12 characters/second
- 6-bar air pressure.
- Hardness of materials to mark up to 62HRC.
- Wide range of characters, from 0.1 mm to complete area.
- Marking alphanumeric codes, logotypes, DATAMATRIX™, QR codes, etc.
- N34 pneumatic header, special for deep marking, and optional N07, N10, N14, N20 pneumatic header.
- Built-in support.
- Optional protection system that is easy to assemble and disassemble.
- 5-meter robotics cable, with customisation possibilities.
- Connection with T2 control unit (see technical file for more information).
- PC edition software.